




Nor-Clad®

**STANDING BY OUR PRODUCTS
AND WARRANTIES FOR 40 YEARS**

Nor-Clad panel is a light gauge, exposed fastener panel with 36" coverage used in residential roof and wall applications.

FEATURES AND BENEFITS

- Full 36" net coverage means fewer panels to handle and install, saving time and money.
- Available in our Dura Tech® x1 paint system or our ZINCALUME® Plus finish for unpainted applications; limited lifetime warranty available on residential applications.
- ColorGuard™ 25 with Spectrascape® available with a 25 year limited warranty for your agricultural, post frame and recreational building applications.
- Specialty finishes in Dura Tech 5000 paint system available in 29ga as a standard offer.
- Weather-resistant lap system with anti-siphon groove provides better weathertightness compared to most other light gauge, exposed fastener panels.
- Available in durable polycarbonate panels.
- Economical standard and custom trim packages available with every order.
- Nor-Clad panel assemblies are Class A Fire Rated when installed on non-combustible deck or framing per IBC or IRC. Nor-Clad panel assemblies are also Class A Fire Rated per UL790 when installed in accordance to UL listings.

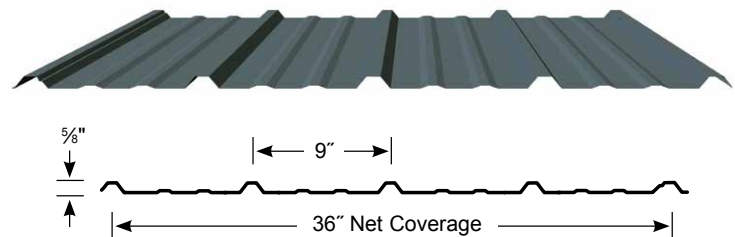

Customer Service, Salem OR
503-390-7174 or 800-272-7023
Customer Service, Spokane WA
509-536-4097 or 800-776-8771
www.ascbp.com

Cool DURA TECH XL

COOL Dura Tech xl


- Superior color retention and resistance to chalk and fade.
- Energy saving **COOL** colors.



COLORGUARD™ 25 with Spectrascape

ColorGuard™ 25 with Spectrascape

- Resistant to chalk and fade with ratings similar to a PVDF.
- Engineered to resist peeling or cracking for 25 years.

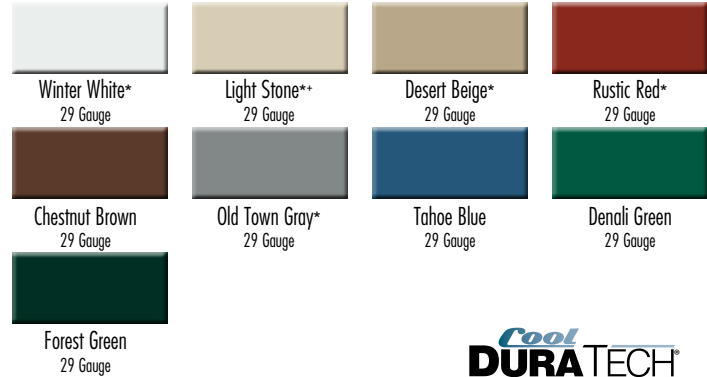

Cool DURA TECH 5000

COOL Dura Tech 5000 available out of Salem only

- Excellent color retention and resistance to chalk and fade.
- Energy saving **COOL** colors.



Product Availability by Gauge and Location

Location	Anchorage Alaska	Spokane Washington	Salt Lake City Utah	Salem Oregon
Dura Tech xl	29ga	29ga	29ga	29ga & 26ga
ColorGuard 25	29ga	29ga	29ga	29ga
Dura Tech 5000			29ga*	29ga

Additional lead times apply on products supplied from a non-local facility.

* ColorGuard 25 colors that meet a minimum .25 solar reflectivity.


* ColorGuard 25 Light Stone 29ga available in Salem.

REPRESENTATION OF COLORS MAY VARY DUE TO PRINTING LIMITATIONS.

Sample color chips are available upon request. Consult your ASC Building Products representative for more information.

LOAD TABLE (Please see technical product sheets online at www.ascbp.com for section properties and technical data)

Gauge	Span	Cond.	Allowable Inward Loads (lbs/ft²) per Span (ft.-in.)						
			2'-0"	2'-6"	3'-0"	3'-6"	4'-0"	4'-6"	5'-0"
29	SS	f	77	49	34	25	19	15	12
		L/120	-	-	-	22	14	10	7
	DS	f	82	52	36	26	20	16	13
		L/120	-	-	-	-	-	-	-
	TS	f	103	65	45	33	25	20	16
		L/120	-	-	-	-	23	16	11
26	SS	f	112	71	49	36	28	22	17
		L/120	-	-	47	29	19	13	10
	DS	f	106	68	47	34	26	21	17
		L/120	-	-	-	-	-	-	-
	TS	f	133	85	59	43	33	26	21
		L/120	-	-	-	-	-	24	17

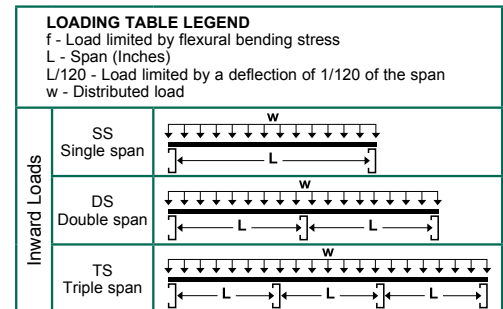

NOTES: (Specifications subject to change without notice.)

- Top values based on allowable stress. Bottom values based on allowable deflection of L/120.
- "-" denotes that the allowable load is limited by the allowable flexural bending stress.
- Steel conforms to ASTM A653 (ZINCALUME) or ASTM A653 80,000 psi minimum yield.
- Tabulated values are for positive (Inward) loading only.
- Values are based on the American Iron and Steel Institute (AISI) "Cold Formed Steel Design Manual" (2007 Edition).



ASC Building Products
is Proudly Distributed by: