





Strata Rib®

**STANDING BY OUR PRODUCTS
AND WARRANTIES FOR 40 YEARS**

Strata Rib is a light gauge, exposed fastener panel with 36" coverage used in residential roof and wall applications.

FEATURES AND BENEFITS

- Weather-resistant lap system with anti-siphon groove provides better weathertightness compared to most other light gauge, exposed fastener panels.
- Purlin-bearing leg speeds up installation of panels and improves the quality of panel side laps.
- Available in our Dura Tech® x/1 paint system or our ZINCALUME® Plus finish for unpainted applications; limited lifetime warranty available on residential applications.
- ColorGuard™ 25 with Spectrascape® available with a 25 year limited warranty for your agricultural, post frame and recreational building applications.
- Available in durable polycarbonate panels.
- Economical standard and custom trim packages available with every order.
- Strata Rib panel assemblies are Class A Fire Rated when installed on non-combustible deck or framing per IBC or IRC. Strata Rib panel assemblies are also Class A Fire Rated per UL790 when installed in accordance to UL listings.

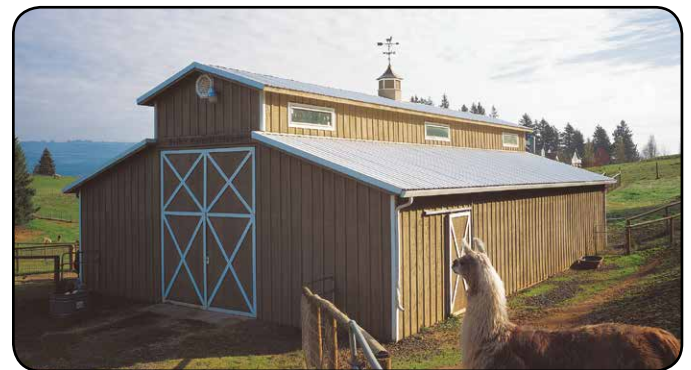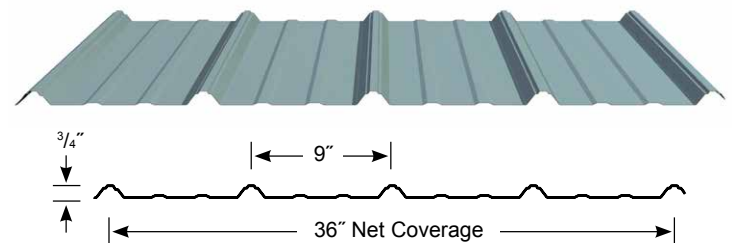

Customer Service, Salem OR
503-390-7174 or 800-272-7023
Customer Service, Spokane WA
509-536-4097 or 800-776-8771
www.ascbp.com

Cool DURA TECH XL

COOL Dura Tech xl

- Superior color retention and resistance to chalk and fade.
- Energy saving **COOL** colors.



COLORGUARD™ 25 with Spectrascape

ColorGuard™ 25 with Spectrascape

- Resistant to chalk and fade with ratings similar to a PVDF.
- Engineered to resist peeling or cracking for 25 years.



Cool DURA TECH 5000

COOL Dura Tech 5000 available out of Salem only

- Excellent color retention and resistance to chalk and fade.
- Energy saving **COOL** colors.



Product Availability by Gauge and Location

Location	Anchorage Alaska	Spokane Washington	Salt Lake City Utah	Salem Oregon
Dura Tech xl	29ga	29ga & 26ga	29ga	29ga
ColorGuard 25	29ga	29ga*	29ga	29ga
Dura Tech 5000			29ga*	29ga

Additional lead times apply on products supplied from a non-local facility.

* ColorGuard 25 colors that meet a minimum .25 solar reflectivity.

* ColorGuard 25 Light Stone 29ga available in Sacramento.

REPRESENTATION OF COLORS MAY VARY DUE TO PRINTING LIMITATIONS.

Sample color chips are available upon request. Consult your ASC Building Products representative for more information.


LOAD TABLE

Gauge	Span	Cond.	Allowable Inward Loads (lbs/ft²) per Span (ft.-in.)						
			2'-0"	2'-6"	3'-0"	3'-0"	4'-0"	4'-6"	5'-0"
29	Single Span	W/Ω	101	65	45	33	25	20	16
		L/180	-	56	32	20	14	10	7
	Double Span	W/Ω	84	54	37	27	21	16	13
		L/180	-	-	-	-	-	-	-
	Triple Span	W/Ω	95	67	46	34	26	20	16
		L/180	-	-	-	-	26	18	13
26	Single Span	W/Ω	124	80	55	41	31	25	20
		L/180	-	69	40	25	17	12	9
	Double Span	W/Ω	105	67	47	35	26	21	17
		L/180	-	-	-	-	-	-	-
	Triple Span	W/Ω	130	84	58	43	33	26	21
		L/180	-	-	-	-	32	22	16

Section Properties					
Gauge	Wt. (lbs/ft²)	I+ (in⁴/ft)	S+ (in³/ft)	I- (in⁴/ft)	S- (in³/ft)
29	0.65	0.0100	0.0169	0.0078	0.0143
26	0.81	0.0123	0.0208	0.0099	0.0179

LOADING TABLE LEGEND

W/Ω- Allowable panel strength
L - Span
L/180 - Load limited by a deflection of 1/180 of the span
w - Distributed load

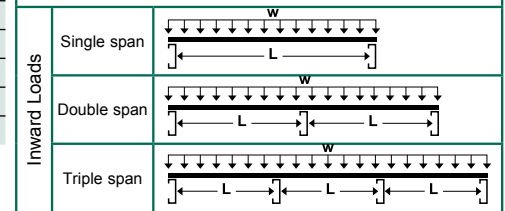

NOTES: (Specifications subject to change without notice.)

- The information in these tables applies to uniform loads only.
- Upper values based on allowable panel strength. Bottom values based on allowable service load deflection of L/180.
- "-" denotes that capacities are limited by panel strength vs. deflection.
- Steel conforms to ASTM A792 (ZINCALUME) 50,000 psi minimum yield.
- Values are based on AISI S100-12



ASC Building Products
is Proudly Distributed by: